

Solenoid Driver, Power Amplifier

KFD2-SL-4

- 4-channel signal conditioner
- 24 V DC supply (Power Rail)
- Output 600 mA per channel
- Logic inputs
- Common safety-oriented disable input
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC/EN 61508

CE SIL2

Function


This signal conditioner is a 4-channel barrier with outputs that switch 600 mA to high-power solenoids. It is also used as power amplifier up to a switching frequency of 1 kHz.

Two channels per module can be paralleled. The output current of a parallel combination is 1.2 A. If the supply voltage falls below 18 V, the outputs will be switched off.

The outputs are sustained short-circuit proofed and overload-proofed

Lead breakage and short circuit, which is selected via DIP switch, is indicated by a red LED and through the collective error output via Power Rail. With the common disable input (terminals 11 and 12), the auxiliary power for all 4 channels can be switched off simultaneously. This central switch-off is also indicated by a red LED and reported as an error signal to the Power Rail.

Connection

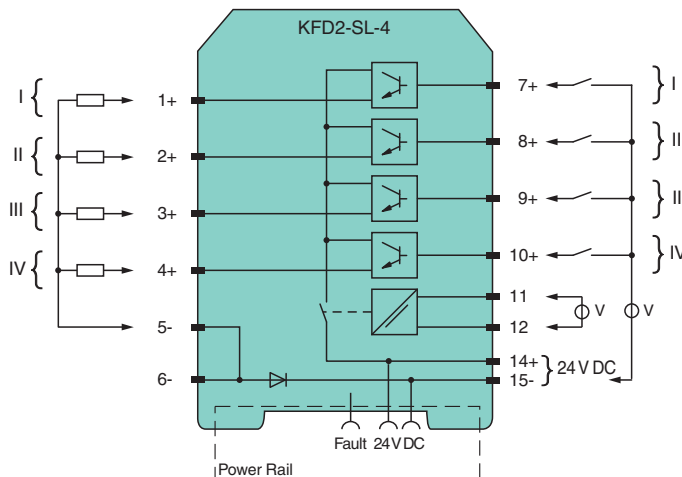

Technical Data

General specifications

Signal type Digital Output

Functional safety related parameters

Safety Integrity Level (SIL) SIL 2

Supply

Connection Power Rail or terminals 14+, 15-

Rated voltage U_r 20 ... 30 V DC

Undervoltage switching-off ≤ 18 V DC

Quiescent current indication < 50 mA at 24 V DC

Release date: 2021-12-17 Date of issue: 2021-12-17 Filename: 112730_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PF PEPPERL+FUCHS

Technical Data







Power dissipation	< 2 W supply voltage 30 V, all outputs loaded with 600 mA	
Input		
Connection side	control side	
Connection	Terminals 7+, 8+, 9+, 10+, 15-	
Input current	approx. 2 mA at 24 V DC	
Signal level	0-signal: 0 ... 5 V DC 1-signal: 16 ... 30 V	
Common disable		
Connection	terminals 11, 12	
Input current	≤ 50 mA at 24 V, depolarized currentless state: downscale of the outputs	
Switch on	min. 15 V	
Switch off	max. 5 V	
Output		
Connection side	field side	
Current	I_e	≤ 600 mA
Voltage	U_e	typ. 23.8 V
Open loop voltage	U_s	24 V DC
Connection	terminals 1+, 2+, 3+, 4+, 5-, 6-	
Switching frequency	f	1 kHz
Output rated operating current	600 mA per channel, sustained short-circuit proof and overload-proof	
Off-state current	I_r	< 1 mA at 24 V DC
Line fault detection	lead breakage: ≤ 4 mA	
Galvanic isolation		
Common disable/input and outputs	basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V _{eff}	
Indicators/settings		
Display elements	LEDs	
Labeling	space for labeling at the front	
Directive conformity		
Electromagnetic compatibility	Directive 2014/30/EU	
	EN 61326-1:2013 (industrial locations)	
Conformity		
Electromagnetic compatibility	NE 21:2011	
Degree of protection	IEC 60529:2001	
Ambient conditions		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Mechanical specifications		
Degree of protection	IP20	
Connection	screw terminals	
Mass	approx. 100 g	
Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D), housing type B2	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

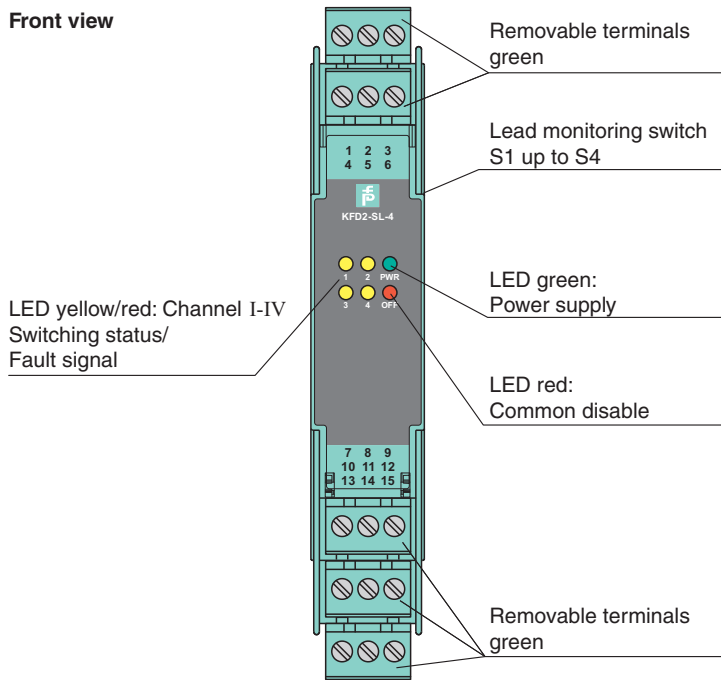Assembly




Front view



Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Release date: 2021-12-17 Date of issue: 2021-12-17 Filename: 112730_eng.pdf

Additional Information

The outputs are switched high and current-limited for each channel (electronically pulsed). They are suited for inductive loads such as magnet operated valves or solenoid coils and incandescent lamps or indicator lamps.

Each channel is continuous short circuit- and overload-proof. In this case, the max. power loss in the device of 2 W ($U_b = 24\text{ V}$) is not exceeded.

2 channels per device may be paralleled input- and output-sided. The output current of this dual combination may not exceed 1.2 A. Both remaining channels may not be loaded with more than (in sum) 200 mA.

The maximum current loading capacity of the Power Rail is to be considered. Alternatively, the device may be supplied with the terminals 14+, 15-.

Device behavior

Behavior in the event of lead breakage (LB)

Input (control side)	Switch position S1 ... S4 line fault detection	LED indication switching state/fault signal	Collective error
0-Signal	II	off	not active
1-Signal	II	yellow	not active
0-Signal	I	flashing red	active
1-Signal	I	yellow	not active

Lead breakage detection is only active when the output is deactivated (0-Signal).

Behavior in the event of a short circuit (SC)

Input (control side)	Switch position S1 ... S4 line fault detection	LED indication switching state/fault signal	Collective error
0-Signal	II	off	not active
1-Signal	II	yellow	not active
0-Signal	I	off	not active
1-Signal	I	flashing red	active

Short circuit detection is only active when the output is activated (1-Signal).

Behavior when common disable is active


If common disable is active (0-Signal at terminals 11, 12), all outputs are switched to a de-energized state. When line fault monitoring S1 ... S4 of a channel is active, its switching state/fault signal LED flashes red and the collective error is output to the Power Rail.

Behavior in the event of undervoltage

If the supply voltage falls below 18 V, the device reacts as follows:

- All outputs are disabled.
- The green power LED goes out.
- A collective error message is output.

Configuration

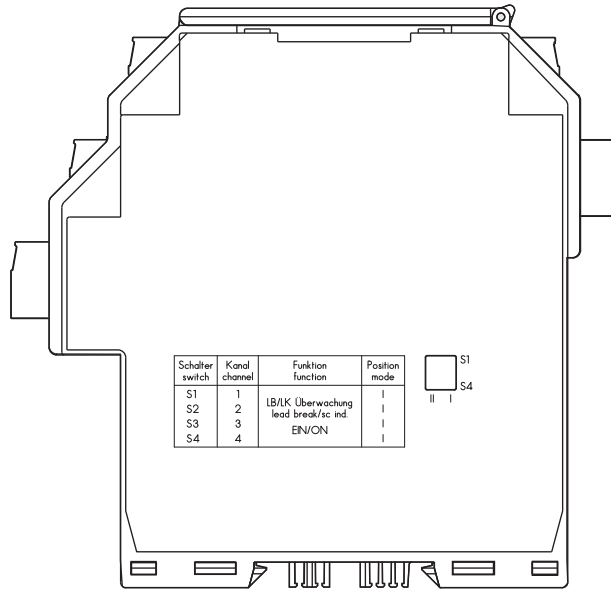

Switch position

Switch	Channel	Function	Position
S1	1	LB/SC	ON I
			OFF II
S2	2	LB/SC	ON I
			OFF II
S3	3	LB/SC	ON I
			OFF II
S4	4	LB/SC	ON I
			OFF II

Release date: 2021-12-17 Date of issue: 2021-12-17 Filename: 112730_eng.pdf